

# Minimum Configuration Insensitive Multifunctional Current-Mode Biquad Using Current Conveyors and All-Grounded Passive Components

Wang Chunhua<sup>1</sup>, Ali Umit Keskin<sup>2</sup>, Leng Yang<sup>1</sup>, Zhang Qiuqing<sup>1</sup>, Du Sichun<sup>1</sup>

<sup>1</sup> School of Computer and Communications, Hunan University, Changsha, 410082, China

<sup>2</sup> Department of Biomedical Engineering, Yeditepe University, 34755 Istanbul, Turkey

wch1227164@sina.com, auk@yeditepe.edu.tr, c.cdly@163.com, clare014201@hotmail.com

**Abstract.** *This paper proposes a new current conveyor-based high-output impedance single-input three-output current mode filter with minimum configuration. It contains two dual output second generation current conveyors, one third generation dual output current conveyor, and four grounded resistors and capacitors. The circuit simultaneously provides low-pass, band-pass, and high-pass filtering outputs, without any passive component matching conditions and restrictions on input signals. Additionally, the proposed circuit offers following advantages: Minimum active and passive element count, high output and low input impedances, suitable for cascading identical current-mode sections, all passive elements are grounded (no virtual grounding), low natural frequency and  $Q$ -factor sensitivities. The influences of non-ideal current conveyors on the proposed circuit are researched in the last.*

## Keywords

Current conveyor, current-mode circuit, filter, parasitic impedance.

## 1. Introduction

Second generation current conveyor (CCII) element which has a single current output terminal is one of the versatile active building blocks to construct continuous-time universal and multipurpose filters, and many of these filters have already been reported in literature [1-3]. CCII can not provide feedforward and feedback currents at the same time, and CCII-based filters become rather complex. Modified current conveyors, such as MOCCII (current conveyor with multi-output terminals) [4-5] and DOCCII (second generation current conveyors with dual output terminals) [6-8] are employed to produce filters. Although the MOCCII-based filters have simple structure, their current tracking errors will increase proportionally with the number of current output terminals. On the other hand, DOCCII has two current output terminals (one positive, another negative), its current tracking errors are relatively small, and it has a balanced output structure.

Many different current mode filter topologies can be realized by employing second generation current conveyors with dual output terminals [6-16]. Structurally, DOCCII based filters and their variants can be divided into three classes: (i) multi-input and multi-output (MIMO) filters [6]; (ii) multi-input and single-output filters [7-9]; (iii) single-input and three-output (SITO) filters [10-16]. The SITO filters can realize second order low-pass (LP), band-pass (BP), high-pass (HP) filters simultaneously without any passive component matching conditions and restrictions on input signals. These filters also allow the realizations of notch and all-pass (AP) filter responses without having to change the filter configurations.

Soliman proposes current mode filter circuit with high-output impedance using three DOCCII and five grounded RC elements [10], the filter's natural frequency and quality factor can be adjusted independently. However, the circuit only produces two-outputs (low-pass and band-pass). In another study, Soliman gives several dual and three outputs CM filter configurations with high impedance outputs [11].

Abuelma'atti et al. propose SITO current mode filter circuit with high-output impedance using three DOCCII, one OTA (operational transconductance amplifier) and five grounded RC elements [12]. Gunes et al. describe a SITO current mode filter circuit employing three DOCCII and four grounded RC components [13]. However, the band-pass and high-pass outputs of this circuit do not provide high-output impedances. Toker et al. present a SITO current mode filter circuit with high-output impedance using three DOCCII, five grounded RC elements [14]. Toker et al. proposed another SITO filter circuit for low frequency operation in [15]. The circuit includes four DOCCII and eight passive elements. Cicekoglu introduces five SITO current mode filter circuits, each of them containing four DOCCII and seven RC components with high-output impedances [16]. Keskin and Cam propose a new SITO current mode filter circuit with high-output impedance using three DOCCII and four passive elements [17]. Although it is a minimum configuration structure, there is one virtually grounded resistor in addition to three grounded passive components in their circuit. The CM DOCCII-based filter introduced by Ikeda and Tomita [18]

has three active and four passive elements, but does not provide simultaneous outputs. While the works in [19], [20] describe minimum configuration circuits with high impedance outputs, both of them contain floating capacitors.

Tangsrirat et al. propose a two-input three-output current-mode filter, which employs three dual-output current-controlled current conveyors (DOCCCs) and two grounded capacitors [21]. In another study, Tangsrirat demonstrates a CM filter with two inputs and two outputs employing four DOCCCs and two grounded capacitors [22]. However, neither of these circuits belongs to SITO topology.

Singh et al. show how a four current conveyor based voltage mode biquad filter with five resistors and two grounded capacitors provides also current mode capability [23].

So far (to the best knowledge of authors), there exists no study on DOCCII-based CM SITO filters offering minimum filter configurations accompanied with all-grounded passive component structure with high impedance outputs.

On the other hand, third generation current conveyor (CCIII) is proposed by Fabre [24], and a CMOS implementation of this circuit is presented in [25]. DOCCIII (third generation current conveyor with two current outputs) can easily be constructed in a CMOS technology. Numerous applications of CCIII element have already been presented in literature [26-30].

In this paper, a new current mode SITO type minimum configuration filter is proposed. This circuit consists of one third generation current conveyor and two second generation current conveyors in addition to four grounded passive elements.

## 2. The Proposed Circuit

The symbolic notations of DOCCII and DOCCIII four terminal active elements are shown in Fig. 1.a, b. DOCCII is characterized by

$$V_x = V_y, I_y = 0, I_{z+} = I_x, I_{z-} = -I_x. \quad (1)$$

On the other hand, third generation current conveyor with dual outputs, DOCCIII is described by

$$V_x = V_y, I_y = -I_x, I_{z+} = I_x, I_{z-} = -I_x. \quad (2)$$

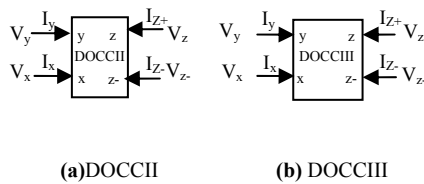


Fig.1. Circuit symbols of DOCCII and DOCCIII.

The proposed circuit is shown in Fig. 2. The circuit contains two DOCCII, one DOCCIII, two grounded resistors and grounded capacitors, and it can realize low-pass, band-pass and high-pass filters simultaneously, at high impedance outputs. From Fig. 2, the input terminal of circuit is terminal Y of DOCCIII, so according to (2) (namely:  $V_x = V_y, I_y = -I_x$ ), it is clear that the circuit has low input impedance. It is convenient for the circuit to be cascaded for its high output impedance and low input impedance.

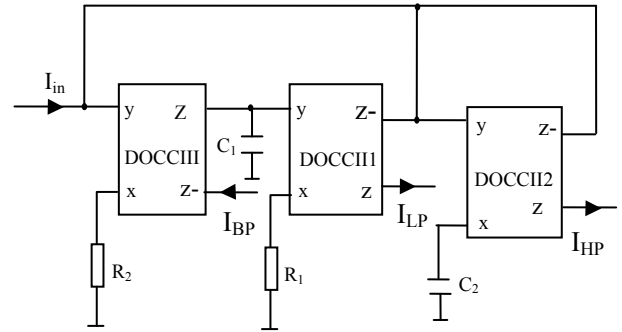


Fig. 2. Proposed SITO current mode filtering circuit.

The filter provides the following transfer functions simultaneously:

$$\frac{I_{LP}}{I_{in}} = \frac{1}{s^2 R_1 R_2 C_1 C_2 + s R_1 C_1 + 1}, \quad (3)$$

$$\frac{I_{BP}}{I_{in}} = \frac{s R_1 C_1}{s^2 R_1 R_2 C_1 C_2 + s R_1 C_1 + 1}, \quad (4)$$

$$\frac{I_{HP}}{I_{in}} = \frac{s^2 R_2 R_1 C_1 C_2}{s^2 R_1 R_2 C_1 C_2 + s R_1 C_1 + 1}. \quad (5)$$

The band-stop (BS) filtering output can be obtained by connecting low-pass and high-pass outputs ( $I_{LP} + I_{HP}$ ), and all-pass (AP) filtering output can be obtained by connecting low-pass, band-pass and high-pass outputs ( $I_{LP} - I_{BP} + I_{HP}$ ) together as depicted in (6), (7). Therefore, the proposed circuit can be easily transformed into a universal filter.

$$\frac{I_{BS}}{I_{in}} = \frac{I_{LP} + I_{HP}}{I_{in}} = \frac{s^2 R_2 R_1 C_1 C_2 + 1}{s^2 R_1 R_2 C_1 C_2 + s R_1 C_1 + 1}, \quad (6)$$

$$\frac{I_{AP}}{I_{in}} = \frac{I_{LP} + I_{HP} - I_{BP}}{I_{in}} = \frac{s^2 R_2 R_1 C_1 C_2 - s R_1 C_1 + 1}{s^2 R_1 R_2 C_1 C_2 + s R_1 C_1 + 1}. \quad (7)$$

The natural angular frequency and quality factor are given in (8a, 8b), respectively.

$$\omega_0 = \sqrt{\frac{1}{R_1 R_2 C_1 C_2}}, \quad (8a)$$

$$Q = \sqrt{\frac{R_2 C_2}{R_1 C_1}}. \quad (8b)$$

Ideal passive  $\omega_0$  and  $Q$  sensitivities are both 1/2 in magnitude.

Taking the non-idealities of the DOCCII and DOCCIII into account, their terminal relationships can be rewritten respectively as follows:

$$V_x = \beta V_y, I_y = 0, I_{z+} = \alpha I_x, I_{z-} = -\alpha I_x, \quad (9)$$

$$V_x = \beta V_y, I_y = \gamma I_x, I_{z+} = \alpha I_x, I_{z-} = -\alpha I_x \quad (10)$$

where  $\alpha$  and  $\gamma$  are current gains and  $\beta$  is voltage gain, and  $\alpha = 1 - \varepsilon_{iz}$ ,  $\gamma = 1 - \varepsilon_{ix}$ ,  $\beta = 1 - \varepsilon_v$ . Here,  $\varepsilon_{iz}$ ,  $\varepsilon_{ix}$ ,  $\varepsilon_v$  are current- and voltage-tracking errors of the DOCCII and DOCCIII.

Considering these non-idealities of the DOCCII and DOCCIII, current transfer functions in Fig. 2 become:

$$\begin{aligned} \frac{I_{LP}}{I_{in}} &= \frac{1}{D(s)}, \frac{I_{BP}}{I_{in}} = \frac{sR_1C_1/(\alpha_1\beta_1)}{D(s)} \\ \frac{I_{HP}}{I_{in}} &= \frac{s^2R_1R_2C_1C_2\alpha_1\beta_1/(\alpha\alpha_1\beta\beta_1)}{D(s)} \end{aligned} \quad (11)$$

where

$$\begin{aligned} D(s) &= s^2R_1R_2C_1C_2\alpha_2\beta_2/(\alpha\alpha_1\beta\beta_1) \\ &+ sR_1C_1\gamma/(\alpha\alpha_1\beta_1) + 1 \end{aligned} \quad (12)$$

In (11), (12);  $\alpha$ ,  $\beta$  and  $\gamma$  are parameters of DOCCIII, and  $\alpha_i$ ,  $\beta_i$  are parameters of DOCCII ( $i=1,2$ ).

The natural angular frequency and quality factor are

$$\omega_0 = \sqrt{\frac{\alpha\alpha_1\beta\beta_1}{R_1R_2C_1C_2\alpha_2\beta_2}}, Q = \frac{1}{\gamma} \sqrt{\frac{R_2C_2\alpha\alpha_1\alpha_2\beta\beta_1\beta_2}{R_1C_1\beta}}. \quad (13)$$

Active sensitivities of the natural angular frequency and the quality factor of the filter shown in Fig. 2 are

$$S_{\alpha, \alpha_1, \beta, \beta_1}^{\omega_0} = -S_{\alpha_2, \beta_2}^{\omega_0} = \frac{1}{2}, S_{\gamma}^{\omega_0} = 0 \quad (14)$$

$$S_{\alpha, \alpha_1, \alpha_2, \beta, \beta_1, \beta_2}^Q = -S_{\beta}^Q = \frac{1}{2}, S_{\gamma}^Q = -1. \quad (15)$$

It is clearly observed that active sensitivities of  $\omega_0$  and  $Q$  do not exceed unity.

### 3. Results of Circuit Simulations

In order to confirm the practical validity of the proposed SITO filter circuit, it is simulated in SPICE using 0.5 $\mu$ m CMOS process parameters for transistors shown in Tab. 1. The CMOS DOCCII [31] given in Fig. 3, and CMOS DOCCIII [25] of Fig. 4 are used in circuit simulations. Tab. 2 lists the transistor dimensions used in two circuits.

Fig. 5 displays the results of circuit simulations for the proposed multifunction filter. Fig. 6 denotes the simulations results of phase and gain for all-pass filtering output.

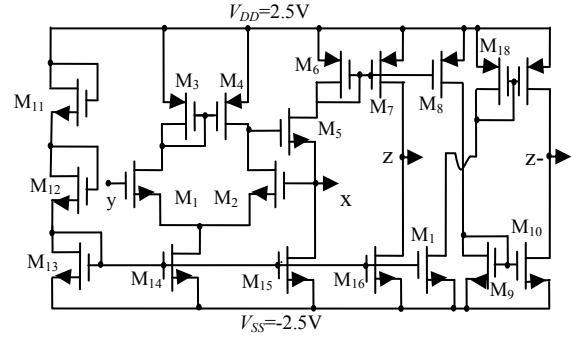


Fig. 3. CMOS DOCCII circuit.

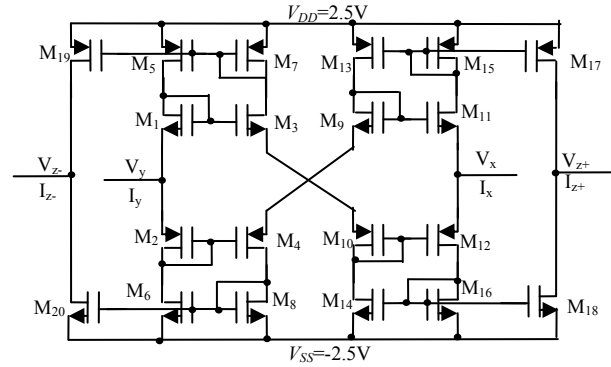


Fig. 4. CMOS DOCCIII circuit.

.MODEL seanmos NMOS(LEVEL=3 PHI=0.700000			
+TOX=9.6000E-09 XJ=0.200000U TPG=1 VTO=0.6684			
+DELTA=1.0700E+00 LD=4.2030E-08 KP=1.7748E-04			
UO=493.4 +THETA=1.8120E-01 RSH=1.6680E+01			
GAMMA=0.5382 +NSUB=1.1290E+17 NFS=7.1500E+11			
VMAX=2.7900E+05 +ETA=1.8690E-02 KAPPA=1.6100E-01			
CGDO=4.0920E-10 +CGSO=4.0920E-10 CGBO=3.7765E-10			
CJ=5.9000E-04 +MJ=0.76700 CJSW=2.0000E-11			
MJSW=0.71000 PB=0.990000)			
.MODEL seapmos PMOS(LEVEL=3 PHI=0.700000			
+TOX=9.6000E-09 XJ=0.200000U TPG=-1 VTO=-0.9352			
+DELTA=1.2380E-02 LD=5.2440E-08 KP=4.4927E-05			
UO=124.9 +THETA=5.7490E-02 RSH=1.1660E+00			
GAMMA=0.4551 +NSUB=8.0710E+16 NFS=5.9080E+11			
VMAX=2.2960E+05 +ETA=2.1930E-02 KAPPA=9.3660E+00			
CGDO=2.1260E-10 +CGSO=2.1260E-10 CGBO=3.6890E-10			
CJ=9.3400E-04 +MJ=0.48300 CJSW=2.5100E-10			
MJSW=0.21200 PB=0.930000)			

Tab. 1. 0.5 $\mu$ m CMOS process parameters for transistors.

DOCCII	M <sub>1</sub> ~ M <sub>4</sub>	M <sub>5</sub> ~ M <sub>10</sub>	M <sub>11</sub> M <sub>12</sub>	M <sub>13</sub>	M <sub>14</sub>	M <sub>15</sub> ~ M <sub>17</sub>	M <sub>18</sub> M <sub>19</sub>
W/L(um)	8/2	10/2	4/2	12/2	19/2	8/2	4/2
DOCCIII	M <sub>1</sub> M <sub>3</sub> M <sub>6</sub> M <sub>8</sub> M <sub>9</sub> M <sub>11</sub> M <sub>14</sub> M <sub>16</sub> M <sub>18</sub> M <sub>20</sub>				M <sub>2</sub> M <sub>4</sub> M <sub>5</sub> M <sub>10</sub> M <sub>12</sub> M <sub>13</sub> M <sub>15</sub> M <sub>17</sub> M <sub>19</sub>		
W/L(um)	4/2				16/2		

Tab. 2. Transistor dimensions in the DOCCII and DOCCIII circuits.

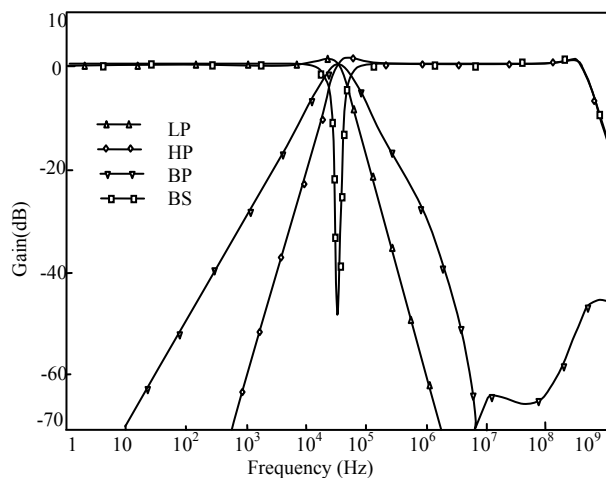


Fig. 5. Results of circuit simulations for basic filter responses of the proposed DOCCII-based SITO biquad.

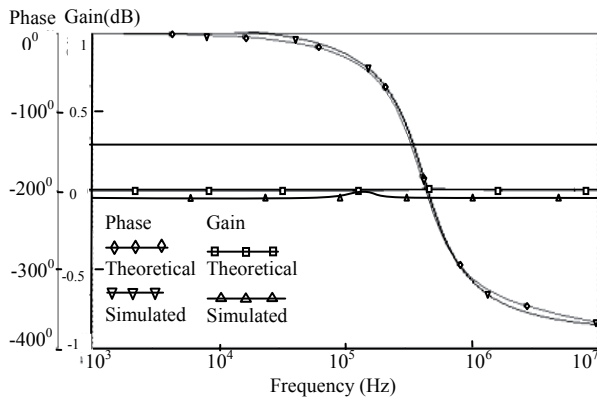


Fig. 6. Frequency responses characteristic of the AP filter.

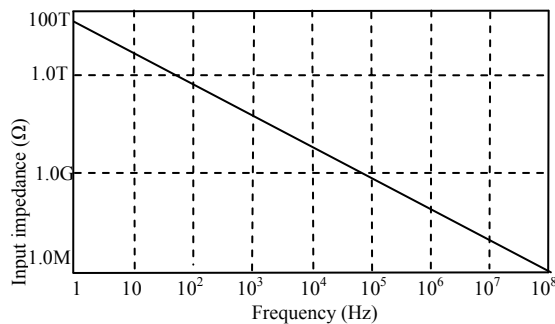


Fig. 7. Input impedance of the filter.

The input and output impedance of CFBCII can be seen in Fig. 7 and Fig. 8. Here, component values are selected as  $R_1 = R_2 = 5 \text{ k}\Omega$ , and  $C_1 = C_2 = 1 \text{ nF}$ , which yield  $f_0 = 34 \text{ kHz}$  and  $Q = 1$ . Fig. 9 shows the simulated band-pass responses with  $Q$ -tuning (i.e.  $Q = 1, 4, 6$ ). In this case,  $R_1 = 5 \text{ k}\Omega$ ,  $1.25 \text{ k}\Omega$ ,  $0.84 \text{ k}\Omega$  and  $R_2 = 5 \text{ k}\Omega$ ,  $20 \text{ k}\Omega$ ,  $30 \text{ k}\Omega$  and  $C_1 = C_2 = 1 \text{ nF}$  respectively while keeping  $\omega_0$  invariant. Supply voltages are  $\pm 2.5 \text{ V}$ . It is noted that the results of circuit simulations are in agreement with theory. For the band-pass filter, the simulated curve departs from ideal beginning at about  $10 \text{ MHz}$ , due to the parasitic

impedances of DOCCII and DOCCIII. This behavior is further analyzed in the following section.

Note that, since the aim of this study is to design a minimum configuration CM-SITO filter, independent control of frequency or quality factor is not expected.

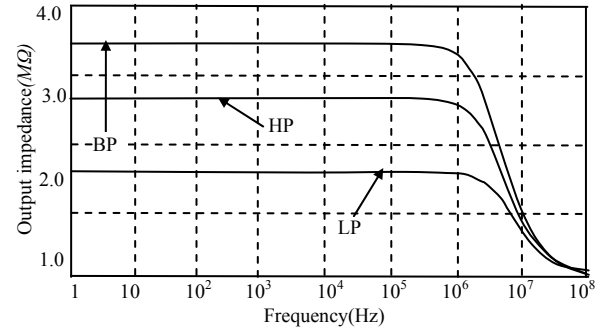


Fig. 8. Output impedance of the filter.

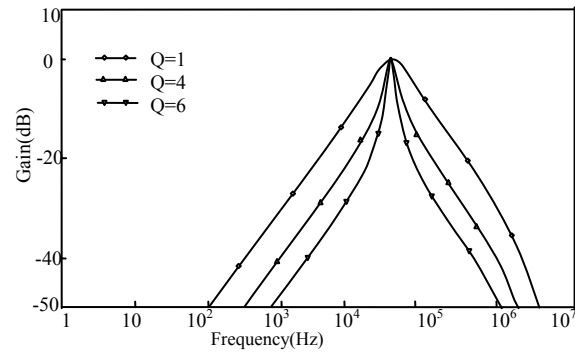


Fig. 9. Simulation results of frequency response of BP filter with different  $Q$  (keeping  $\omega_0$  invariant).

## 4. Parasitic Impedance Influence of DOCCII and DOCCIII

The non-ideal CCII [32] and CCIII models are shown in Fig. 10. The real CCII and CCIII has parasitic resistors and capacitors at terminal  $z$  to the ground, and a serial resistor at the input terminal  $x$ . In the CCII, parasitic resistors and capacitors exist at terminal  $y$  to the ground [32]. A series parasitic resistor exists at the terminal  $y$  of the CCIII. Here,  $\alpha(s)$  and  $\beta(s)$  are used to represent the frequency domain transfer functions of the internal current and voltage followers of the CCII and CCIII, respectively, and they are considered as having unity values here.

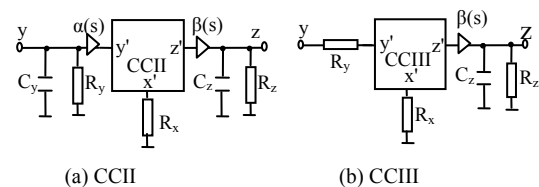


Fig. 10. Non-ideal CCII and CCIII with their parasitic resistors and capacitors.



be easily cascaded, since it realizes three simultaneous filter functions at high impedance outputs, while its input impedance is low. In this filter, AP and notch responses can also be obtained by interconnecting the corresponding outputs. Moreover, all passive components are grounded, and its frequency and Q-factor sensitivities are low.

## Acknowledgements

The authors would like to thank the National Natural Science Foundation of China for financially supporting this research under grant No. 60676021.

## References

- [1] HIGASHIMURA, M., FUKUI, Y. Universal filter using plus-type CCII<sub>s</sub>. *Electronics Letters*, 1996, vol. 32, p. 810-811.
- [2] SOLIMAN, A. M. Kerwin-Huelsman-Newcomb circuit using current conveyors. *Electronics Letters*, 1994, vol. 30, no. 24, p. 2019-2020.
- [3] CHANG, C. M., CHEN, P. C. Universal active current filter with three inputs and one output using current conveyors. *International Journal of Electronics*, 1991, vol. 71, no. 5, p. 817-819.
- [4] WU, J., MASRY, E. E. Current-mode ladder filters using multiple output current conveyors. *IEE Proceeding-G*, 1996, vol. 143, no. 4, p. 218-222.
- [5] HORNG, J. W., HOU, C. L., CHANG, C. M., et al. Universal current filter with single input and three outputs using MOCII<sub>s</sub>. *Int. Journal of Electronics*, 2007, vol. 94, no. 4, p. 327 to 333.
- [6] SUN, Y., JEFFERIES, B. Current-mode biquadratic filters using dual output current conveyor. In *Proceedings of the of the 5<sup>th</sup> IEEE International Conference on Electronic Circuits and Systems*. September 1998, p. 135-8.
- [7] GUNES, E. O., TOKER, A., OZOGUZ, S. Insensitive current-mode universal filter with minimum components using dual-output current conveyors. *Electronics Letters*, 1999, vol. 35, no. 7, p. 524 to 525.
- [8] SIRIPRUCHYANUN, M., JAIKLA, W. Three-input single-output electronically controllable dual-mode universal biquad filter using DO-CCII<sub>s</sub>. *The Journal of KMITNB.*, 2007, vol. 17, no. 1.
- [9] JAIKLA, W., SILAPAN, P., SIRIPRUCHYANUN, M. Low-component electronically controllable dual-mode universal biquad filter using DO-CCII<sub>s</sub>. In *Int. Symposium on Communications and Information Technologies (ISCIT 2007)*.
- [10] SOLIMAN, A. M. Current mode universal filter. *Electronics Letters*, 1995, vol. 31, p. 1420-1.
- [11] SOLIMAN, A. M. New current mode filters using current conveyors. *AEU Int J. Electron. Commun.*, 1997, vol. 51, no. 5, p. 275-278.
- [12] ABUELMA'ATTI, M. T., KHAN, M. H. Low component current-mode universal filter. *Electronics Letters*, 1995, vol. 31, p. 216-1.
- [13] GUNES, E. O., ANDAY, F. Realization of universal current mode filters using CFCCII<sub>s</sub>. *Electronics Letters*, 1996, vol. 36, p. 1081 to 1082.
- [14] TOKER, A., OZOGUZ, S. Insensitive current-mode universal filter using dual output current conveyors. *Int J Electron.*, 2000, vol. 87, p. 667-74.
- [15] TOKER, A., OZOGUZ, S. Integrable current-mode filter realization using dual-output current conveyors for low-frequency operation. *AEU Int J Electron Commun*, 2001, vol. 55, p. 145-9.
- [16] CICEKOGLU, O., TARIM, N., KUNTMAN, H. Wide dynamic range high output impedance current-mode multifunction filters with dual-output current conveyors. *AEU- Int J Electron Commun.*, 2002, vol. 56, p. 55-60.
- [17] KESKIN, A. U., CAM, U. Insensitive high-output impedance minimum configuration SITO-type current-mode biquad using dual-output current conveyors and grounded passive components. *AEU- Int. J. Electron. Commun.*, 2007, vol. 61, p. 341 - 344.
- [18] IKEDA, K., TOMITA, Y. Realization of current-mode biquadratic filter using CCII<sub>s</sub> with current followers. *Electron. Commun. Jpn.*, Part. 2, Electron., 1994, vol. 77, p. 99-107.
- [19] TOKER, A., ÖZOGUZ, S., ÇİÇEKOGLU, O. High output impedance current-mode multifunction filters with minimum number of active and passive elements using dual-output current conveyors. *Frequenz*, 1999, vol. 53, p. 206-209.
- [20] TOKER, A., ÖZOGUZ, S., ÇİÇEKOGLU, O. A new current-mode multifunction filter with minimum components using dual-output current conveyors. In *Proc. of ITC-CSCC'99*, 1999, vol. 1, p. 301-303.
- [21] TANGSRIRAT, W., SURAKAMPONTORN, W. High output impedance current-mode universal filter employing dual-output current-controlled conveyors and grounded capacitors. *AEU-Int J. Electron. Commun.*, 2007, vol. 61, no. 2, p. 127-131.
- [22] TANGSRIRAT, W. Current-tunable current-mode multifunction filter based on dual-output current-controlled conveyors. *AEU-Int J. Electron. Commun.*, 2007, vol. 61, no. 8, p. 528-533.
- [23] SINGH, V. K., SINGH, A. K., SENANI, R. Dual function capability of recently proposed four-current-conveyor-based VM biquad. *Journal of Circuits, Systems, and Computers*, 2005, vol. 14, no. 1, p. 51-56.
- [24] FABRE, A. Third-generation current conveyor: A new helpful active element. *Electron. Lett.*, 1995, vol. 31, no. 5, p. 338 to 339.
- [25] PIOVACCARI, A. CMOS integrated third-generation current conveyor. *Electronics Letters*, 1995, vol. 31, no. 105, p. 1228 -9.
- [26] SUDANSHU, M., IQBAL, A. K. Novel first order allpass section using single CCIII. *Int. Journal of Electronics*, 2001, vol. 88, p. 773-778.
- [27] WANG, H. Y., LEE, C. T. Systematic synthesis R-L and C-D immittances using single CCIII. *Electronics Letters*, 2000, vol. 87, p. 293-294.
- [28] AHMET, M. T., KHAN, I. A., MİNHEJ, N. On transconductance quadrature oscillators. *Int. Journal of Electronics*, 1997, vol. 83, no. 2, p. 201-207.
- [29] UN, M., KACAR, F. Third generation current conveyor based current-mode first order all-pass filter and quadrature oscillator. *Journal of Electrical & Electronics Engineering*, 2008, vol. 8, no. 1, p. 529-535.
- [30] LATTENBERG, I., VRBA, K., DOSTÁL, T. Bipolar CCIII+ and CCIII- conveyors and their current mode-filter application. In *Proc. of the Fourth IEEE International Caracas Conference on Devices, Circuits and Systems*. Aruba, ICCDCS Publications. 2002, p. 1 - 4. ISBN 0-7803-7381-2.
- [31] SURAKAMPONTORN, W., KIEWRUJA, V., KUMWACHARA, K., et al. Accurate CMOS-based current conveyors. *IEEE Trans. on Instrumentation and Measurement*, 1991, vol. 40, no. 4, p. 699 to 702.
- [32] FABRE, A., SAAID, O., BARHELEMY, H. On the frequency limitations of the circuits based on second generation current conveyors. *Analog Integrated Circuits and Signal Processing*, 1995, vol. 7, no. 2, p. 113-129.

### About Authors...

**Wang Chunhua** was born in Yongzhou, China, in 1963. He received the B.Sc degree from Hengyang Teacher's College, Hengyang, China, in 1983, the M.Sc degree from Physics Department, Zhengzhou University, Zhengzhou, China, in 1994, the Ph.D. degree from School of Electronic Information and Control Engineering, Beijing University of Technology, Beijing, China, in 2003. He is currently a Professor of School of Computer and Communication, Hunan University, Changsha, China. From 2004 to 2005, he served as a Professor and the associate Dean of Information Engineering, Xiangtan University, Xiangtan, China. His research interests include current-mode circuit design, filtering, radio frequency circuit and wireless communications.

**Ali Umit Keskin** was born in Bursa, Turkey. He received his B.SEE. degree from the Bogazici University in 1978, M.SEE. from the Yildiz Technical University (1980) and Ph.D. degree from the Institute of Science and Technology,

Istanbul Technical University (1984). In 1985, he joined Siemens AG, Turkey. He was engaged in the field of Medical Instrumentation throughout his professional career. Now he is affiliated as an Associate Professor in the Faculty of Engineering, Yeditepe University, Istanbul. His main research interests are analog circuits and signal processing, transducers, spectroscopy, medical instrumentation theory and its applications.

**Leng Yang** was born in Changde, Hunan, China, in 1984. She received the B.S. from Hunan Normal University in 2006. She is studying in Hunan University for master degree now. She is interested in analog IC circuit and filter design.

**Zhang Qiuqing** was born in Jishou, Hunan, China, in 1982. She received the B.S. from School of Computer and Communication, Changsha University of Science and technology. She is studying in Hunan University for her Ph.D. degree now. She is interested in analog IC circuit and filter design.